

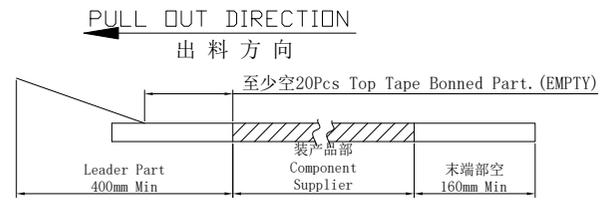
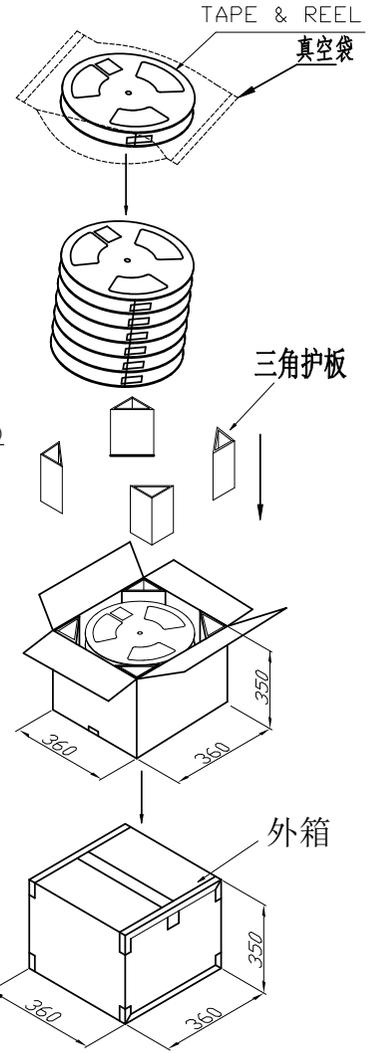


REV.	DESCRIPTION	DATE
B/0	升B版	2017.06.20


- Note:
- 1.Sprocket holes pitch cumulative tolerance  $\pm 0.1$ . (Accumulative Pitch  $\pm 0.2$ )
  - 2.Carrier camber is within 1mm in 100mm.
  - 3.All dimensions meet EIA-481-D requirements.
  - 4.Thick ness:  $0.4 \pm 0.1$ mm.
  - 5.Material of top fape: PET, PE, PEF
  - 6.Material of carrier fape: Poystyrene
  - 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.

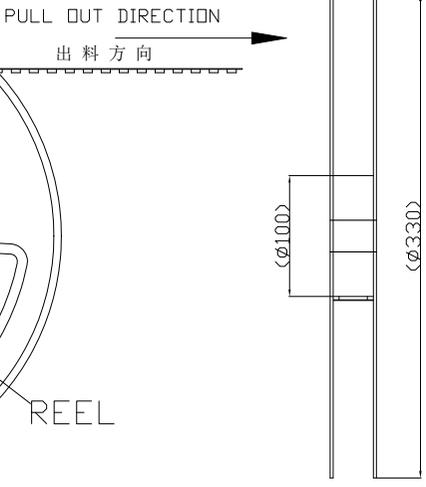

载带带头及带尾尺寸  
Lead tape length

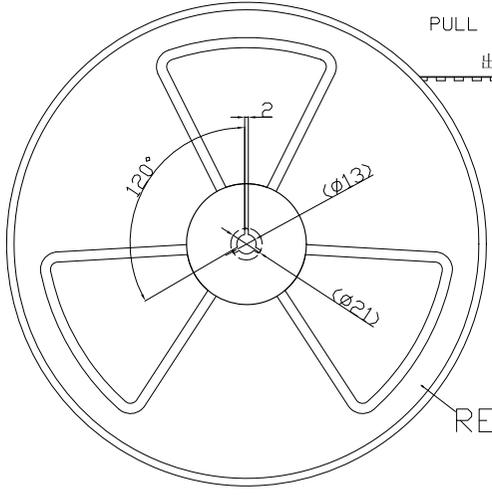

载带上下带剥离强度: 0.1N--1.3N (10g-130g)  
Peeling off force of top tape:  
0.1N--1.3N (10g-130g)

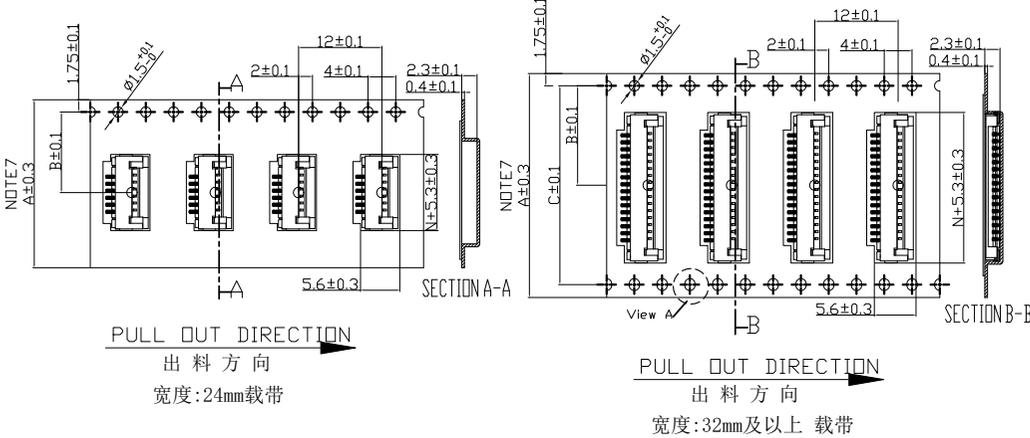

借用登记  
旧底图总号  
底图总号  
签字  
日期

芯数 Pin (n)	PART NO.	尺寸 Size		
		A	B	C
4-8	60065-040*-*****-60065-080*-*****	24.0	11.5	—
16	60065-160*-*****	32.0	14.2	28.4
20-24	60065-200*-*****-60065-240*-*****	44.0	20.2	40.4
30-32	60065-300*-*****-60065-320*-*****	56.0	26.2	52.4

PART No.	60065-**0*-*****			
REEL WIDTH	24	32	44	56
PCS/REEL	2000			
REEL/BOX	12	9	7	5
BOX/PCS	24K	18K	14K	10K
CTN. SIZE	360*360*350			

GENERAL TOLERANCES		
0.X	$\pm 0.25$	$X^\circ \pm 3^\circ$
0.XX	$\pm 0.12$	
0.XXX	$\pm 0.05$	$X.X^\circ \pm 0.5^\circ$

DRAWN BY	赵博博/2017.06.20
CHK. BY	崔华文/2017.06.20
APRV. BY	洪新江/2017.06.20
DRAWING NO.	004-0065-001

**ZJXFE** 新富尔电子有限公司  
XINFUER ELECTORN CO.,LTD

SHEET 1 OF 1  
PROD. NAME 1.0G-nPBX  
PART NO. 60065-\*\*0\*-\*\*\*\*\*

TITLE  
0.5 FPC CONN. ZIF SMT BACKFLIP H=2.0 DOUBLE LOWER CONTACT