



REV.	DESCRIPTION	DATE
B/0	升级版本	2016.11.30



NOTES:

1. MATERIAL SEE TABLE;
2. PLATING SEE TABLE;
3. RATING
- 3-1. OPERATING TEMPERATURE: -25~85°C
- 3-2. OPERATING VOLTAGE: 50V AC/DC
- 3-3. CURRENT RATING: 0.5 AMPS
- 3-4. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/Minute;
- 3-5. INSULATION RESISTANCE: 500MΩ Min;
- 3-6. CONTACT RESISTANCE: 0.03Ω Max;
4. PART NO.

60089-**01-5001



SERIES

CIRCUIT NO.



Packing Option:
0=Reel Packing
1=Tube Packing

Lead Free & HF
5=Halogen-Free


Plating:
1=BRIGHT-TIN 80μ"Min
OVER Ni 30μ"Min..

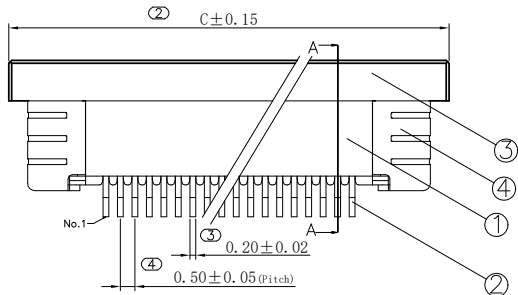


SECTION A-A

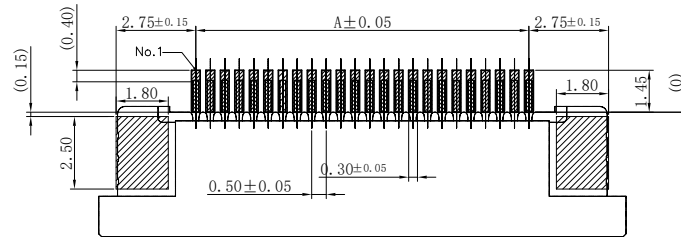

适用线路板
RECOMMENDED PCB LAYOUT

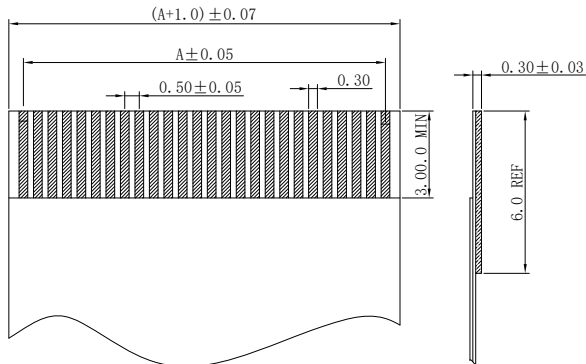

适用FPC寸法
APPLICABLE FPC



CKT	Dim A	Dim B	Dim C	CKT	Dim A	Dim B	Dim C
4	1.5	2.56	8.2	33	16	17.06	22.7
5	2	3.06	8.7	34	16.5	17.56	23.2
6	2.5	3.56	9.2	35	17	18.06	23.7
7	3	4.06	9.7	36	17.5	18.56	24.2
8	3.5	4.56	10.2				
9	4	5.06	10.7				
10	4.5	5.56	11.2				
				40	19.5	20.56	26.2
12	5.5	6.56	12.2				
13	6	7.06	12.7				
14	6.5	7.56	13.2				
15	7	8.06	13.7				
16	7.5	8.56	14.2	45	22	23.06	28.7
18	8.5	9.56	15.2				
20	9.5	10.56	16.2				
				50	24.5	25.56	31.2
22	10.5	11.56	17.2				
23	11	12.06	17.7				
24	11.5	12.56	18.2				
25	12	13.06	18.7	54	26.5	27.56	33.2
26	12.5	13.56	19.2	55	27	28.06	33.7
27	13	14.06	19.7				
28	13.5	14.56	20.2				
29	14	15.06	20.7				
30	14.5	15.56	21.2				
				60	29.5	30.56	36.2
32	15.5	16.56	22.2				

4	122-0087-001	焊片 Fitting Nail	磷青铜 Phosphor Bronze	2	电镀(锡): 整个表面电镀30u"MIN, 再镀锡 80u"MIN.
3	142-0087-001	铜片 Actuator	LCP(UL94V-0)	1	黑色
2	112-0087-001	端子 Contact	磷青铜 Phosphor Bronze	n×1	电镀(锡): 整个表面电镀30u"MIN, 再镀锡 80u"MIN.
1	132-0087-001	基座 Housing	LCP(UL94V-0)	1	本色
序号	图号	名称	材料	数量	附注
GENERAL TOLERANCES			DRAWN BY 赵博/2016.11.30	 新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
0.X	±0.25	X." ±3°	CHK. BY 崔华文/2016.11.30		
0.XX	±0.12		APRV. BY 洪新江/2016.11.30		
0.XXX	±0.05	X.X" ±0.5°	DRAWING NO. 006-0089-001	SHEET 1 OF 1	PROD. NAME 0.5-11-nPBS-A
UNIT	SIZE	SCALE	PART NO. 60089-**01-5001		
MM	A4	1:1	TITLE 0.5 FPC CONN. ZIF SMT DRAWER H=2.0 UPPER CONTACT		