


REV.	DESCRIPTION	DATE
B/0	升 B 版	2016.12.06



Note:

- 1.Sprocket holes pitch cumulative tolerance ± 0.1 .(Accumulative Pitch ± 0.2)
- 2.Carrier camber is within 1mm in 100mm.
- 3.All dimensions meet EIA-481-D requirements.
- 4.Thick ness: 0.4 ± 0.1 mm.
- 5.Material of top fape: PET, PE, PEF
- 6.Material of carrier fape: Poystyrene
- 7.For tape width (dimension A) 16mm and 24mm a pilot hole is provided on one side. For tape width (dimension A) 32mm and 44mm pilot holes are provided on both sides.



TAPE & REEL
PE袋

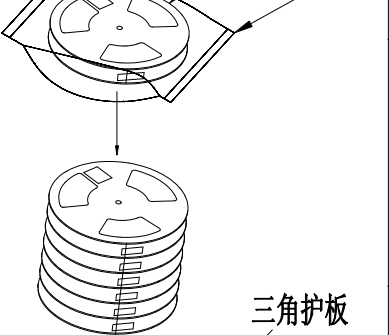


三角护板

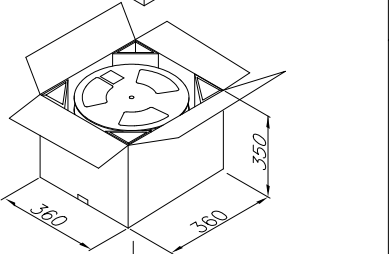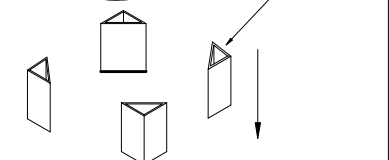

外箱

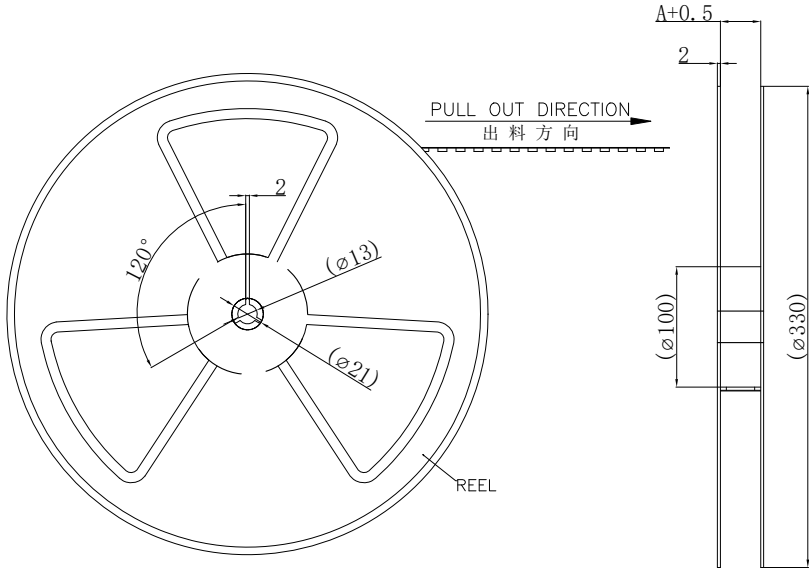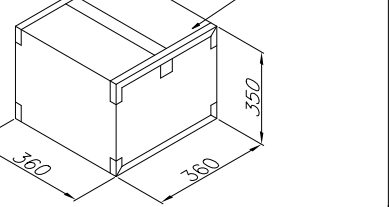


PULL OUT DIRECTION
出料方向

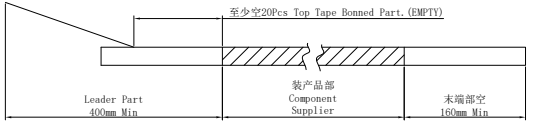

载带带头及带尾尺寸
Lead tape length

PULL OUT DIRECTION
出料方向



载带上下带剥离强度: 0.1N--1.3N(10g-130g)
Peeling off force of top tape:
0.1N--1.3N(10g-130g)

借用登记

B

旧底图总号

底图总号

签 字

日 期

A

600**--**0*-50**
SERIES
CIRCUIT NO.
Packing Option
Lead Free & HF
Plating

芯 数 Pin (n)	尺 寸 Size		
	A	B	C
4	16.0	7.5	-----
5-19	24.0	11.5	-----
20-30	32.0	14.2	28.4
32-55	44.0	20.2	40.4
60	56.0	26.2	52.4

PART No.	60087/60089--**0*-50** 60021/60022--**0*-50**
REEL WIDTH	16 24 32 44 56
PCS/REEL	2000
REEL/BOX	16 12 9 7 5
BOX/PCS	32K 24K 18K 14K 10K
CTN. SIZE	360*360*350

GENERAL TOLERANCES	DRAWN BY 赵博博/2016.12.06
0.X ± 0.25 0.XX ± 0.12 0.XXX ± 0.05	CHK. BY 崔华文/2016.12.06
X.* $\pm 3^\circ$ X.X* $\pm 0.5^\circ$	APRV. BY 洪新江/2016.12.06
UNIT	MM
SIZE	A4
SCALE	1:1
DRAWING NO.	004-0087-001

ZJ XFE 新富尔电子		新富尔电子有限公司 XINFUER ELECTORN CO.,LTD	
SHEET	1 OF 1	PROD. NAME	0.5-11-nPBX(S)-A(B)
PART NO.	60087/89/21/22--**0*-50**	TITLE 0.5 FPC CONN. ZIF SMT DRAWER H=2.0 LOWER CONTACT	